

Fig 2 (a)

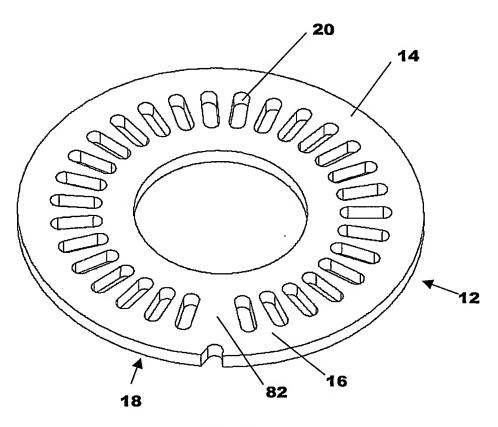


Fig 2 (b)

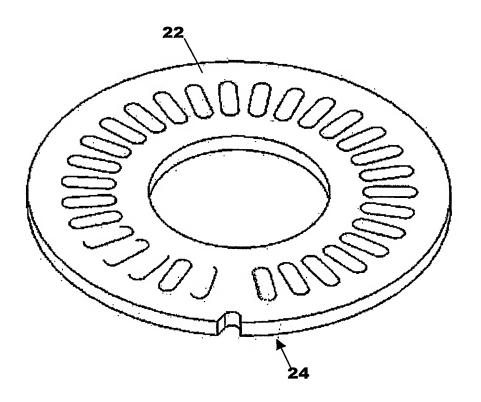


Fig 3 (a)

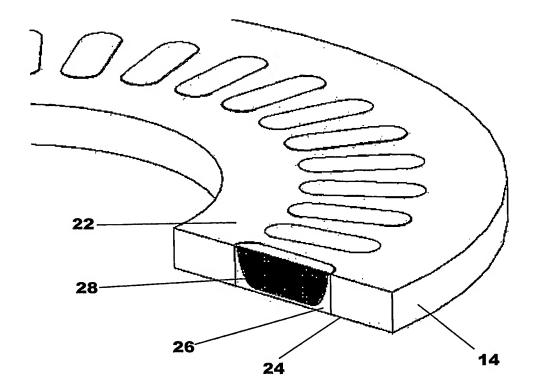


Fig 3 (b)

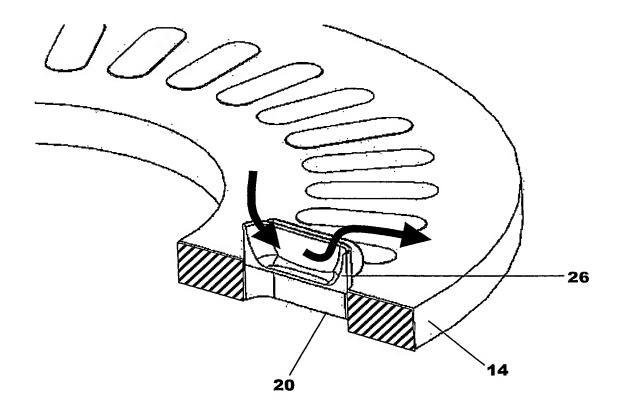


Fig 4 (a)

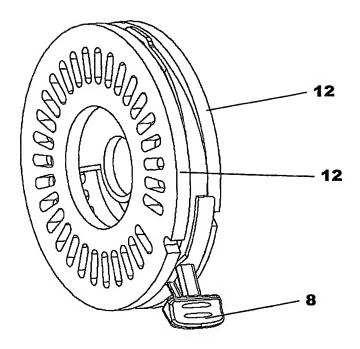
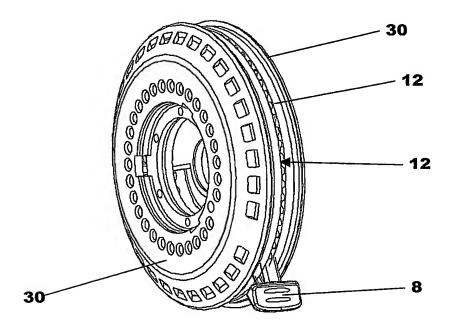
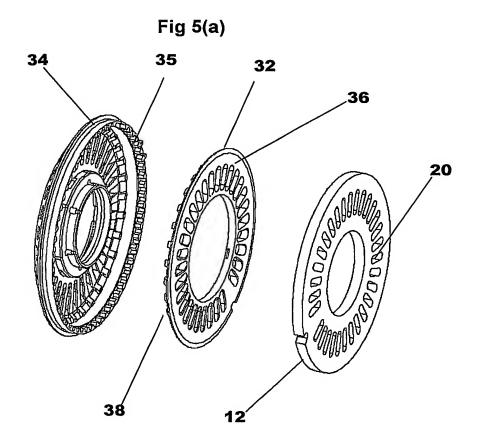


Fig 4 (b)





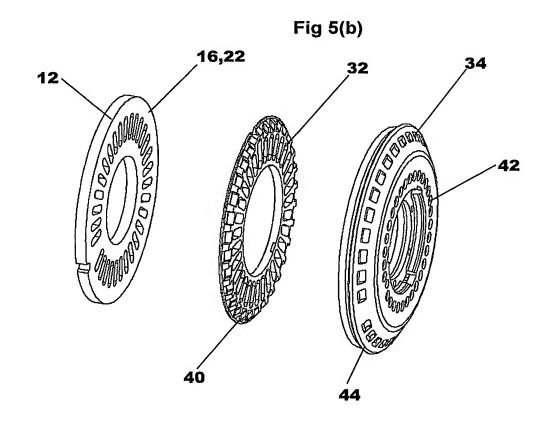


Fig 6

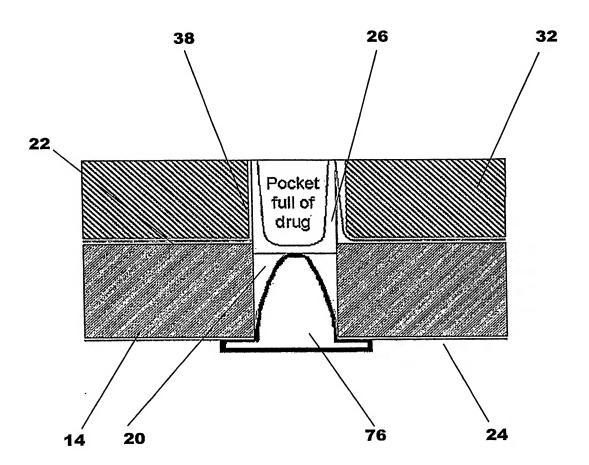


Fig 7(a)

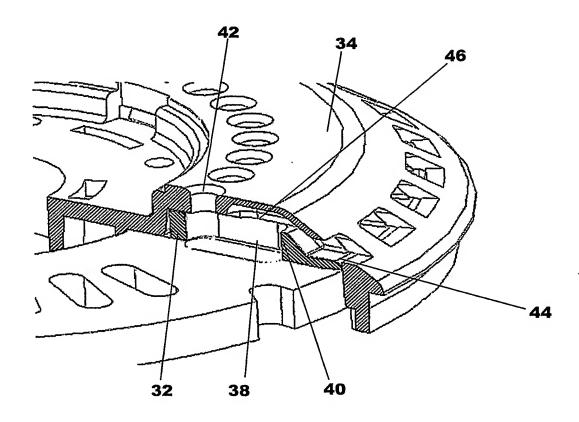
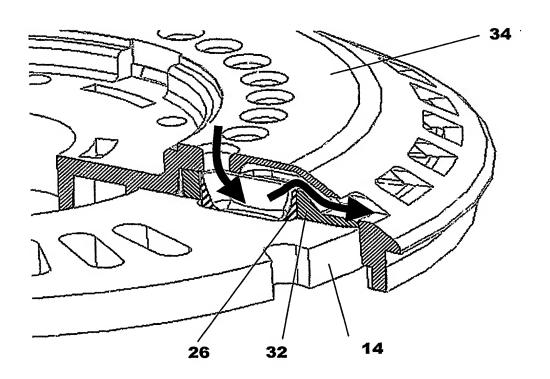
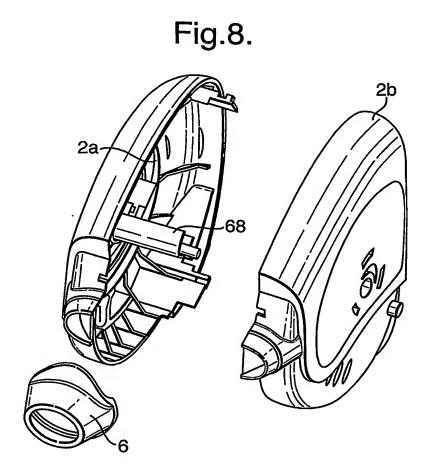
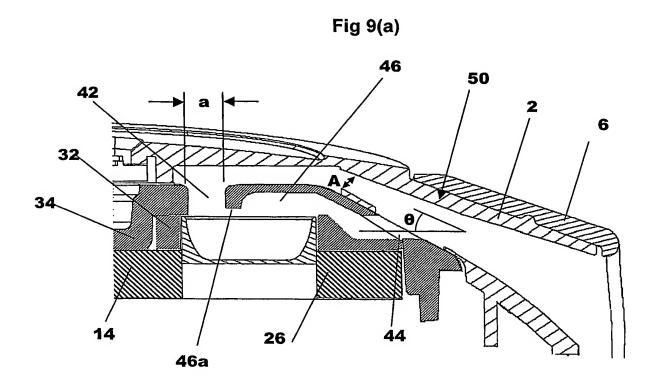


Fig 7(b)







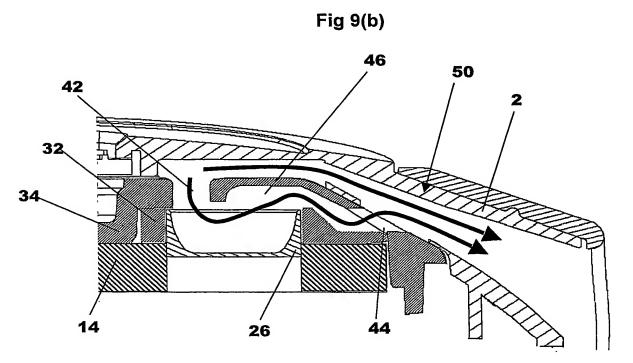


Fig 10

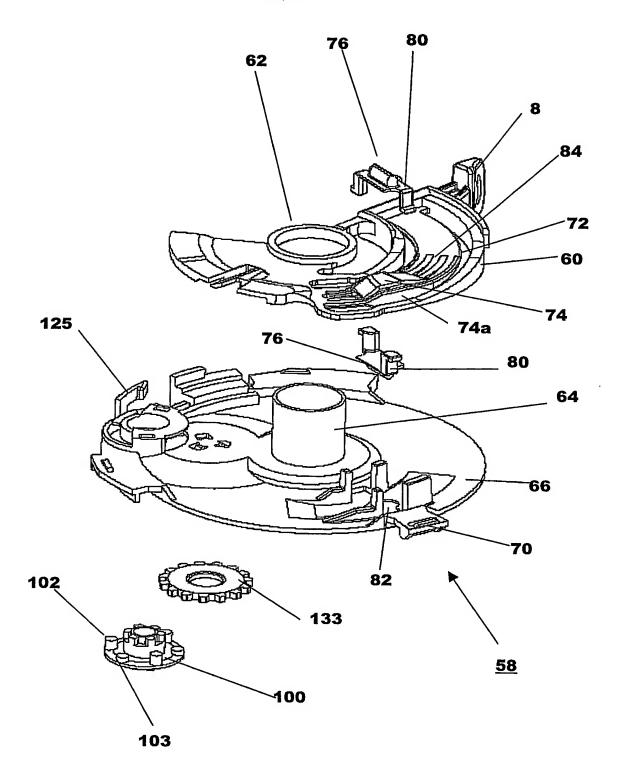


Fig 11

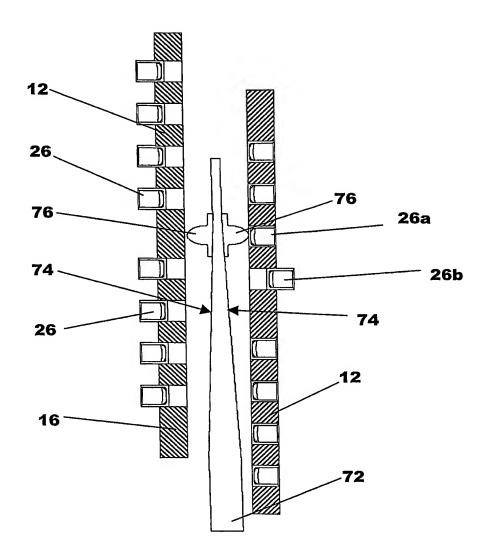


Fig 12





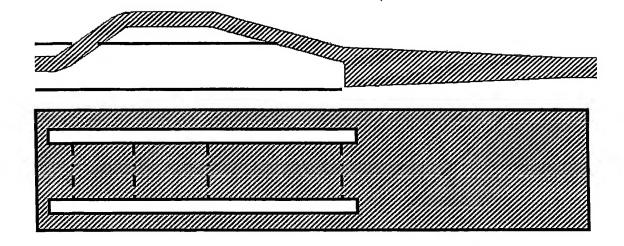



Fig 13

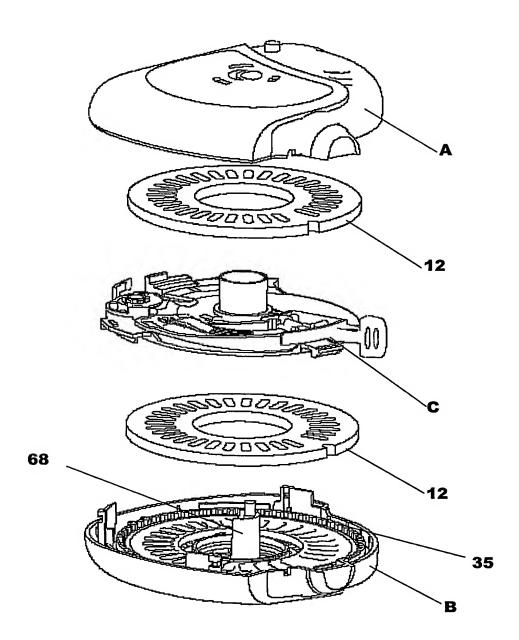

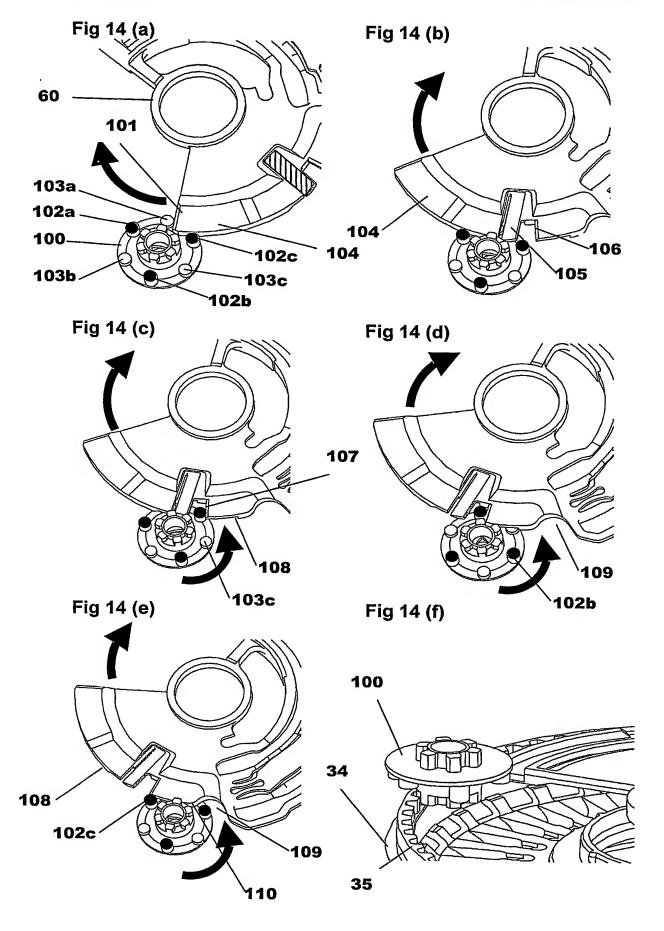

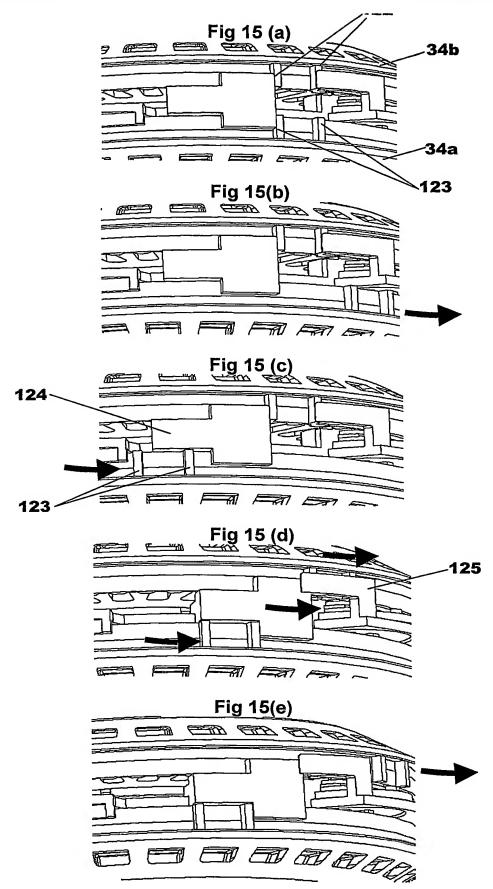

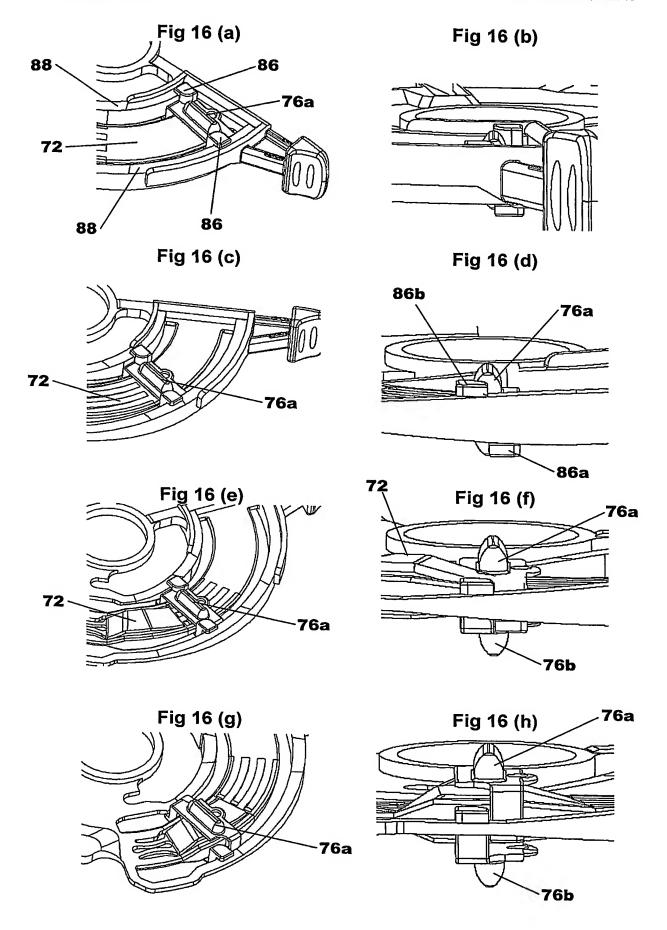

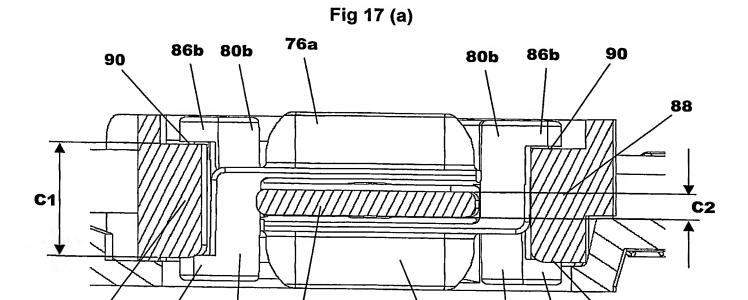

76b

80a

72

80a

86a

90

86a

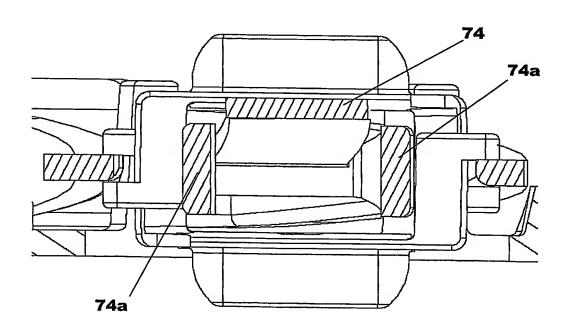
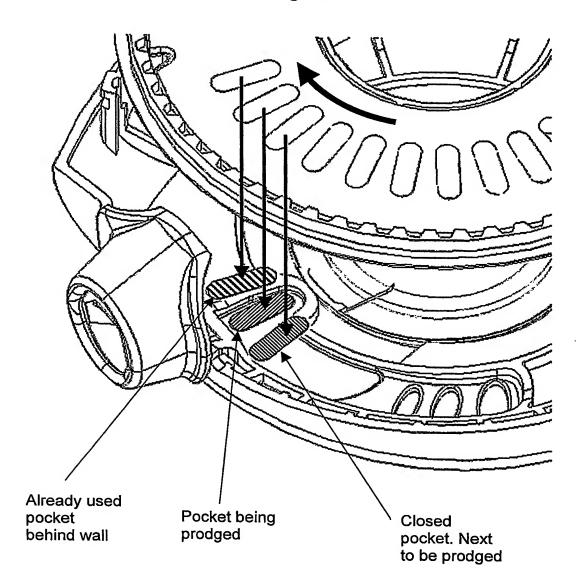
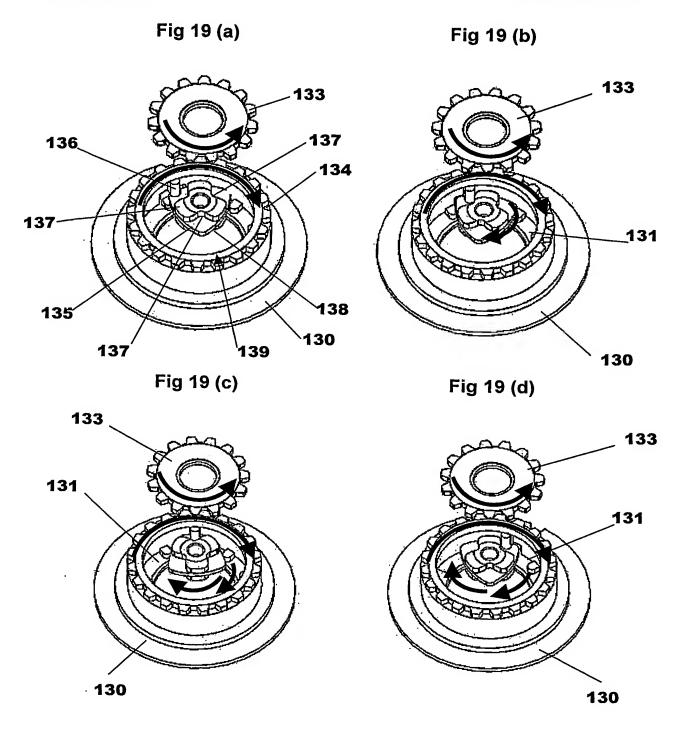
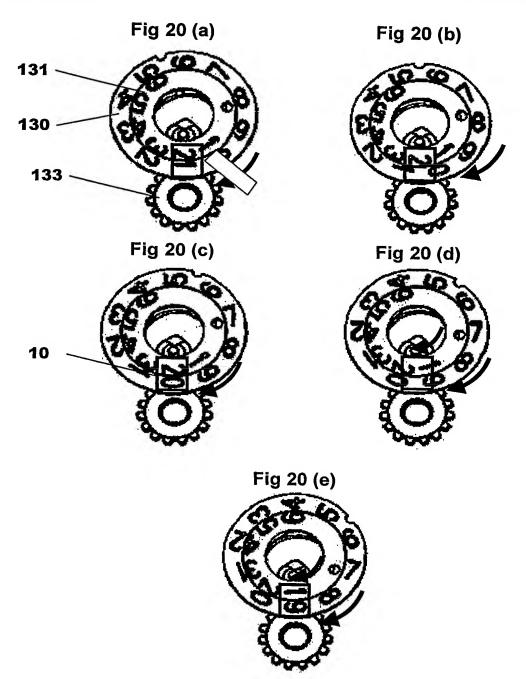


Fig 17 (b)

Fig 18







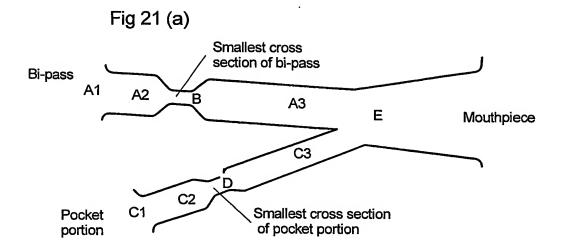


Fig 21 (b)

Bi-pass minimum area (B) 5.0mm2

Common pathway minimum area (E) 12 mm2

Pocket portion minimum area (D) 3.8 mm2